

ASSA ABLOY

TECH SHEET: FRAME-02

Issue date: 20-04-2015 Expiry date: 13-12-2018

5

8

ĩ

 $\overline{\mathbf{c}}$

82


õ

હે

25

ŝ

FRAME PROFILES Fire Rated Frames

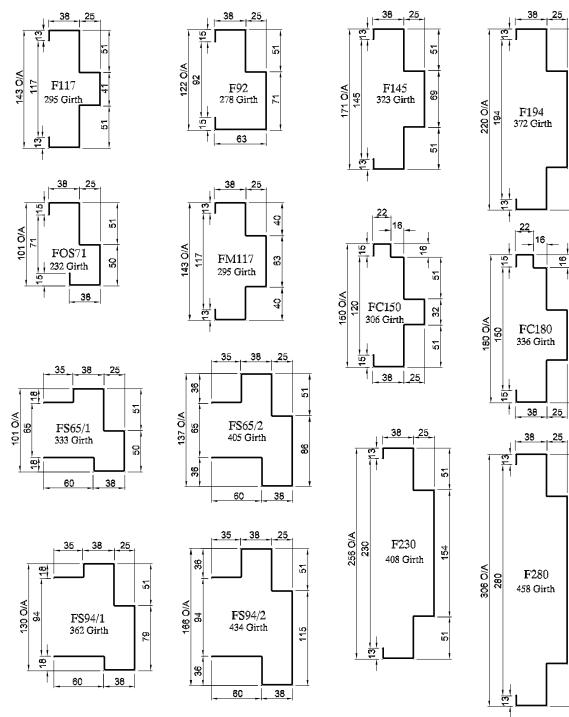

Note: When installed with appropriate door leaf, frames are fire rated up to 4 hours in masonry walls, and 2 hours in dry wall. Custom frame profiles available on request. Frames are typically 1.2-1.6 zincanneal unless otherwise requested.

Pyropanel Developments Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166 Ph: (03) 9837 8500 Fax: (03) 9837 8550 Email: sales@pyropanel.com.au Web: www.pyropanel.com.au

HOW TO SPECIFY

"Door frame to be a Pyropanel F117* Prime painted pressed metal door frame. Builder to confirm door frame applicability".

* denotes example - delete, change or specify as required

Distributed by: Holland Fire Doors & Windows 23 Saggart Field Rd, Minto, NSW, 2566 Ph: 9603 8500 Email: sales@hollandfiredoors.com.au

Pyropanel Developments has a policy of continuous improvement and reserves the right to change methods and specifications without notice. Note: The Tech Sheet is an uncontrolled document, If printed please refer to the Tech-Sheet on the website to check if this document is valid.